



### 4 Hook Euro Cylinder Door Lock

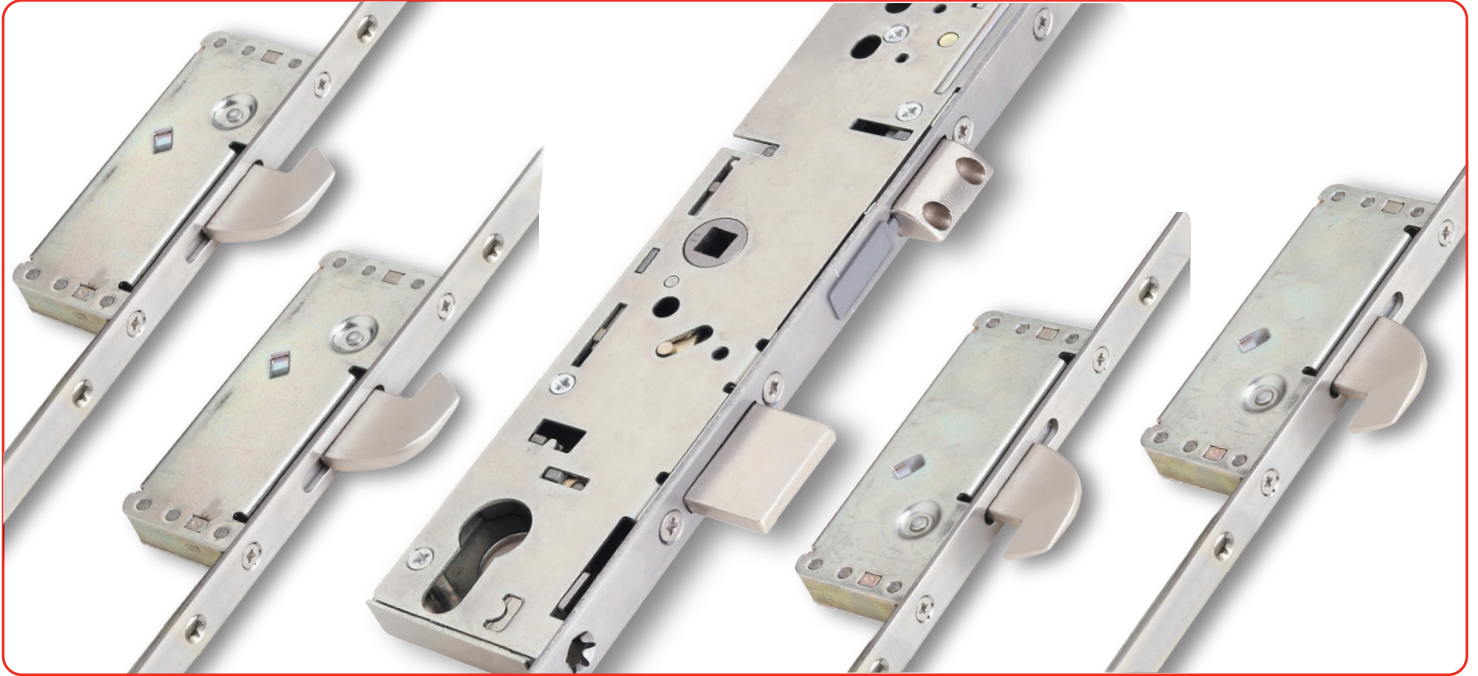

#### Features

- Designed to meet the requirements of PAS 24 as part of a compliant door system, and BS 6375
- Available with a 45mm backset and 20mm face bar
- Non-handed lock mechanism with reversible sash bolt to minimise stock requirements
- Snib facility as standard on all locks
- Central brass deadbolt throws 22mm to prevent unauthorised entry
- Bi-directional throw of locking features - enhanced anti-jemmy feature
- Four high security hooks for anti-separation resistance - 10mm (maximum) engagement into keeps
- Hooks deadlocked in the fully thrown position
- Accepts standard 92mm unsprung handles and euro profile cylinders
- Split spindle for lever/pad applications - choice of length available
- Patented adjustable steel keeps giving  $\pm 2.0\text{mm}$  for composite and timber doors
- Single and French door (passive lock unit) applications

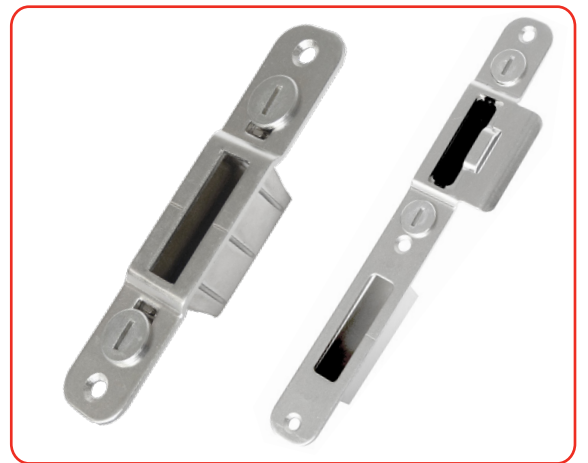

Keeps

## 4 Hook Euro Cylinder Door Lock

### Ordering Details

To select the required 4 hook MPL determine:

1. The face bar and backset
2. The overall length of the unit
3. The position of the hooks

#### KEY

<b>B</b>	Backset	<b>TH2</b>	Top Hook
<b>FB</b>	Face Bar	<b>BH2</b>	Bottom Hook
<b>DL</b>	Datum Line		
<b>OL</b>	Overall Length		
<b>TH1</b>	Top Hook		
<b>BH1</b>	Bottom Hook		

B	FB	DL	OL	TH1	TH2	BH1	BH2	Part No.
45	20	667	1635	364	728	334	667	6945-995-79ROCA

### Technical Information

#### Corrosion resistance

Meets the requirements of BS EN 1670:2007 Grade 4 (240 hours)

#### Operation

Endurance tested in excess of 50,000 cycles

#### Performance

Tested to meet the requirements of PAS 24 as part of a compliant door set

### Material Specification

Lock case: Steel BZP CR3 Passivate + Seal

Face bar: Stainless Steel

Hooks and Dead/Sash bolt: Steel BZP CR3 Passivate + Seal

Keeps: Steel BZP CR3 Passivate + Seal

### Packaging

**Locks:**  
5 locks per box

### Maintenance

All moving parts should be lightly lubricated using a light non-acidic mineral oil (e.g. "3 in 1") twice per year and the surface cleaned with a soft damp cloth. The product may need to be adjusted and fixings tightened to ensure a satisfactory operation.

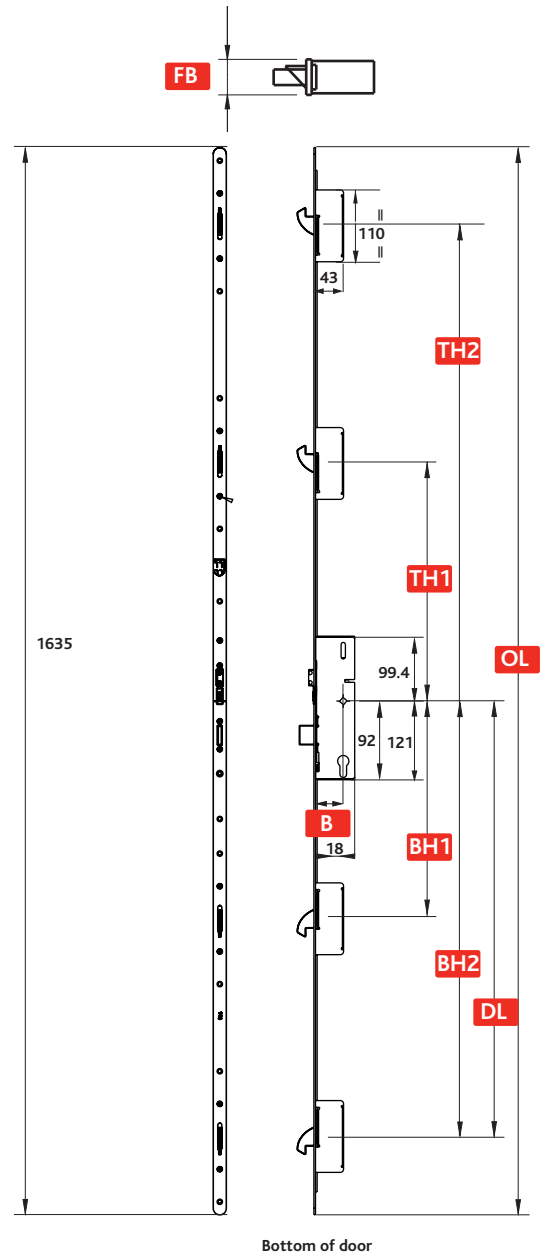


Diagram illustrates product in locked position.

All dimensions are in mm and are nominal.

ERA reserves the right to change specification without notice. It is the responsibility of the door manufacturer to ensure that the finished product meets any required safety and performance specification.